

Base ring assembly: Cut out selected base ring along solid outline.


Fold along dotted line, and attach (tape or glue) grey square to underside of "lock chamber".

Tape "lock chamber" to cage to secure the device.

Cage assembly: Cut out cage along solid outline. Cut out windows (grey) using craft knife.

Fold along all dotted lines.

Attach (tape or glue) tabs to inside of cage.

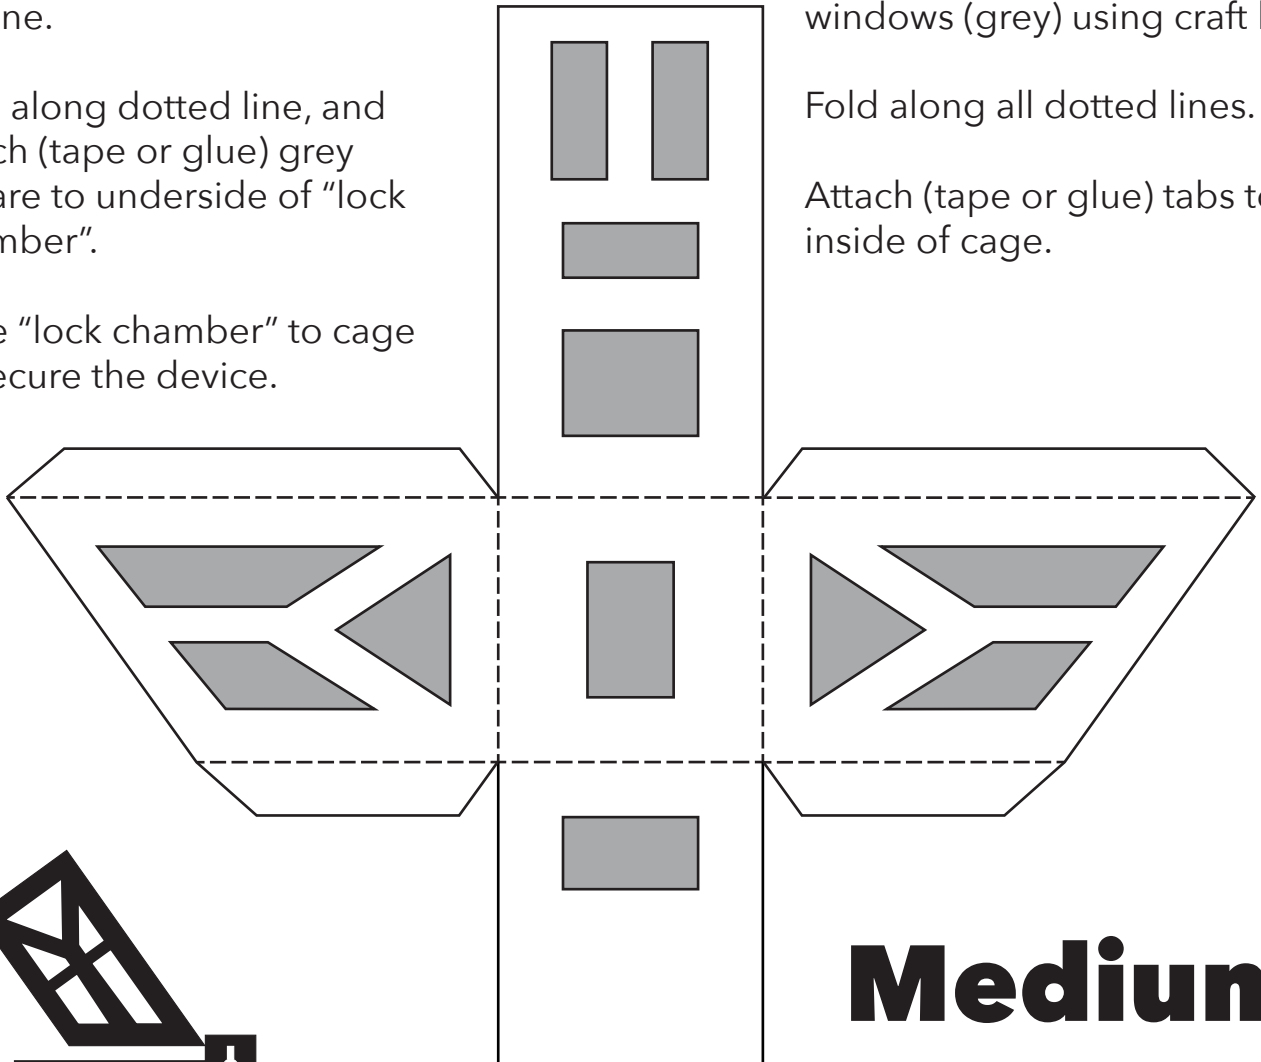

**KINK2D**

**Medium**

(a [kink3d.com](http://kink3d.com) product)